


CONFIGURACION - JP1

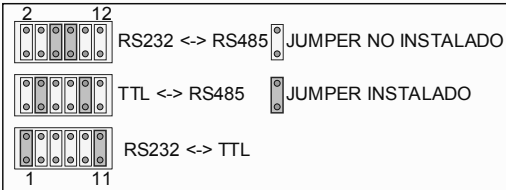

OTROS JUMPER / POR DEFECTO:

- RS232_EN: DS14C232 Alimentado - en uso
- WR_EN1: Auto Tx_Enable
- GND_EN: Abierto, GND via 100R
- JR1: Cerrar si req. Termin R=120R

PLACA DIN-RS485/RS232 V1

R.OLIVA - L&R ING. REV08-07-2011 BASED ON J.AXELSON / R.E.SMITH (I)
PCB BY N.J.CORTEZ 06-2011

(I) J.AXELSON - "SERIAL PORT COMPLETE" 2ND ED. 2007
Lakeview Research LLC - www.lvr.com
and R.E.SMITH - www.rs485.com

Diseño y producción:

